

Barracuda Track



Please read these instructions carefully before commencing installation and retain for future reference. If in doubt, we advise that you consult a qualified electrician to install the product. These products must not be modified, if modification is made or product is not installed with these installation instructions it will invalidate the warranty and may render the product




Warning

1. For indoor use only.
2. If cable is defective, do not use or exchange the cable.
3. The light source of this luminaire is replaceable by the Manufacturer or approved agent.
4. We do recommend that a qualified electrician should be used to install the product.
5. Install in accordance with IEE Wiring regulations and current Building Regulations.
6. This light fitting should be connected to a fused circuit
7. If replacing an existing fitting, make a careful note of the connections.
8. Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority for recycling advice.

Important safety Notes





1. Switch off the electricity at the mains before commencing installation and remove the appropriate circuit fuse to avoid accidental switching on of the mains supply.
2. Make sure all connections are tight with no loose strands.
3. Ensure fire regulations are not breached when fitting your

Installation - Suspended

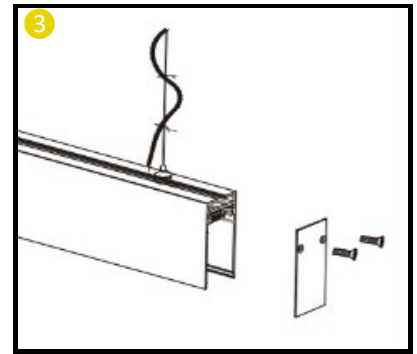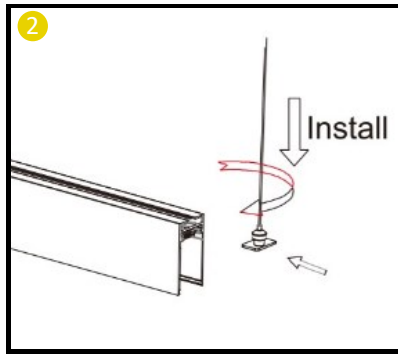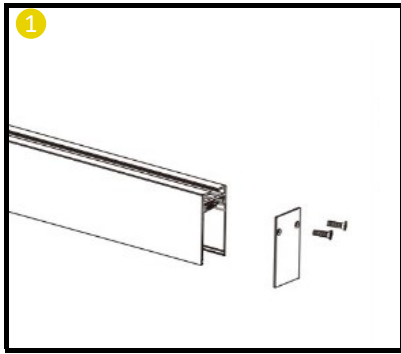

1. Using the Barracuda Track as a template, measure the desired fixing centers on the rear of the luminaire (centers will vary depending on product length). Mark these dimensions on to the surface desired and use the appropriate fixing for the substrate. Note: typical centers are product length minus 50mm each end, however these are adjustable along the back of the profile.
2. Mount the wire gripple fixings to the ceiling and offer up the luminaire using the clutch post pictured by depressing the nipple. Adjust to required height and cut off any excess wire.
3. Cut down the power cable to the length required for suspension and terminate to the required junction (see next page for wiring polarity).

Installation - Surface

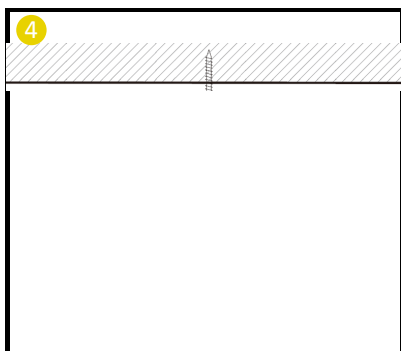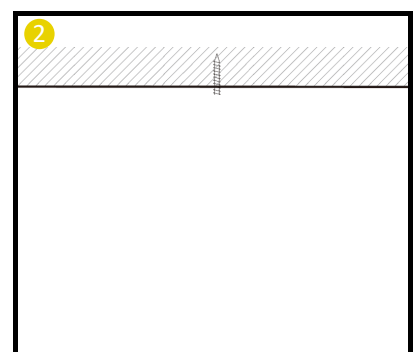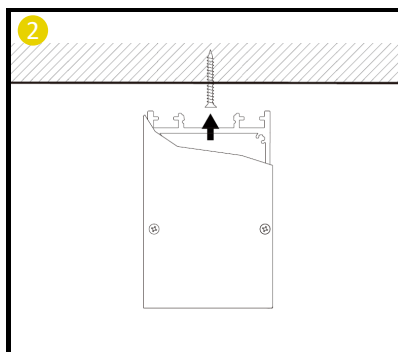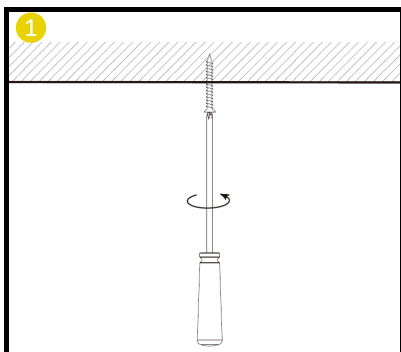

1. Using the Barracuda luminaire as a template, remove the decorative plate and carefully slide the track up to 70mm to the mounting holes on the rear of the luminaire (holes will vary depending on product length). Mark these dimensions on to the surface desired and use the appropriate fixing for the substrate.
2. Terminate to the External Driver on the terminals on the profile
3. Obtain the appropriate anchoring fixings and use a suitable tool to fix the profile in place. (Recommend to fix the opposite side from the removed plate first)
4. Finally, add the magnetic decorative plate back in position.

Wiring

