

Anura



Performance



Typical Lumen Outputs	Wattage	lm/cW
3942 lm	40.4 W	97.6 lm/cW
4293 lm	40.4 W	106.3 lm/cW

Rated Supply Voltage	220 – 240 V
AC Voltage Range	202 – 250 V
Mains Frequency	50/60 Hz
Output LF current ripple @ 120Hz (Flicker)	<10%
Overvoltage Protection	320 V
THD	<20%
Dimming Type	DALI/1-10V
Dimming Range	1 - 100%
Operating Temperature	-25 +60 °C
Longevity	50,000 hours
UGR Rating	<21
IK Rating	IK08
IP Rating	IP65
Colour Rendering	Ra>82
Dimensions	1275 x 86 x 80mm
Fixing Centres	860 x 26mm
Weight	1.5kg
Warranty	5 Years
Certification	CE, ROHS

Emergency

Lumen Output	BLF	Emergency Lumen Output
3942 lm	20%	788 lm
4293 lm	20%	859 lm

Emergency Duration	3 Hours Central Test Facility
Recharge Period	24 Hours
Battery Type	NiMH (Nickel-Metal Hydride)
Battery Pack	4 x 2.0V 4.0Ah
Parasitic Load	1.5W
Operating Temperature	0 – 60°C
Power Efficiency	95%
Certification	CE, ROHS

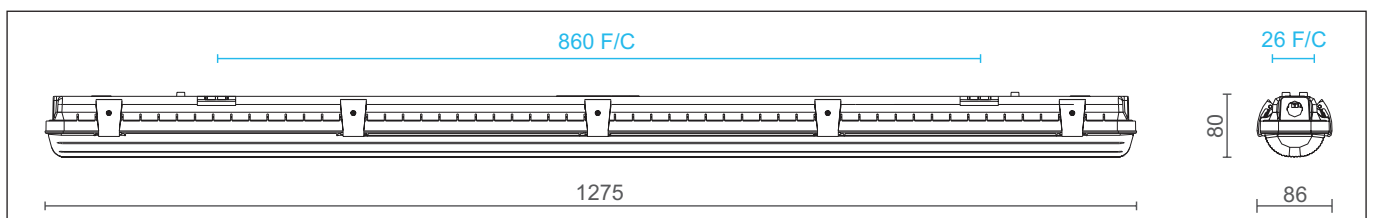

BumbleBee