

Viper



Performance

Lumen Output	Wattage	lm/cW
5,340 lm (4000K)	60.1 W	88.6 lm/cW
6,520 lm (4000K)	75.1 W	86.8 lm/cW



Rated Supply Voltage	220 – 240 V
AC Voltage Range	202 – 250 V
Mains Frequency	50/60 Hz
Output LF current ripple @ 120Hz (Flicker)	<10%
Overvoltage Protection	290 V
THD	<10%
Dimming Range	1 - 100%
Operating Temperature	-25 +60 °C
Longevity	50,000 hours
UGR Rating	<19
Colour Rendering	Ra>82
Dimensions	70 x 110 x 1207/1507mm
Weight	6.2/7.5kg
Warranty	5 Years
Certification	CE, ROHS

Emergency

Lumen Output	BLF	Emergency Lumen Output
5,340 lm	10%	534 lm
6,520 lm	8%	522 lm

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 2.4V 2.5Ah
Parasitic Load	1.2W
Operating Temperature	0 – 60°C
Power Efficiency	95%
Certification	CE, ROHS

60% DLOR

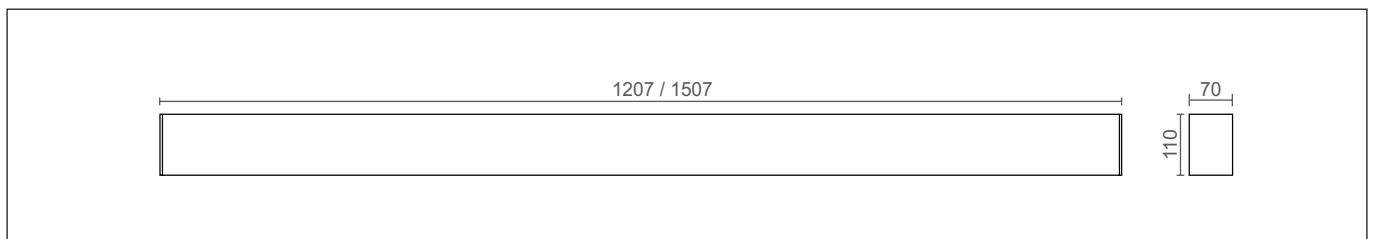

BumbleBee

Tel: 01489 878 406 Email: info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk
BumbleBee, Unit 11, Lycroft Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ