


Eclipse OA Datasheet



Performance

Lumen Output	Wattage	lm/cW
210 lm	3 W	70.0 lm/cW

Rated Supply Voltage	220 - 240 V
Mains Frequency	50/60 Hz
Output LF current ripple @ 120Hz (Flicker)	<5%
Overvoltage Protection	320 V
In-rush Current	0.5 A
THD	<10%
Operating Temperature	0-55°C
Cutout	Ø30
LED Head	Ø37 x 14mm
Driver Module	185 x 20 x 20mm
Battery	Ø23 x 138mm
Warranty (Excluding Battery)	5 Years
Certification	CE, ROHS

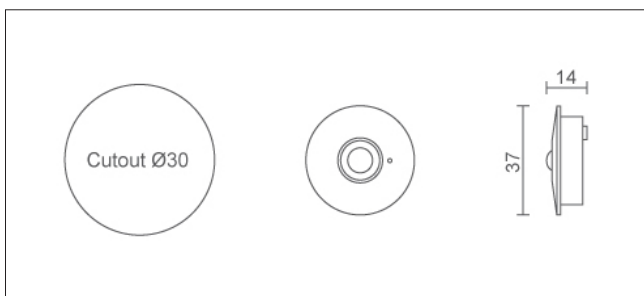

Emergency

Standard Lumen Output	BLF	Emergency Lumen Output
210 lm	100%	210 lm

Duration	3 Hours
Recharge Period	24 Hours
Battery Type	Ni-Cd Cells (Nickel-Cadmium)
Battery Pack	3.6v 1.8mAh



BumbleBee

Tel: 01489 878 406 Email: info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk
 BumbleBee, Unit 11, Lycroft Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ