

# Shield SUS Datasheet




## Performance

Wattage	3W
Rated Supply Voltage	220 - 240 V
Mains Frequency	50/60 Hz
Output LF current ripple @ 120Hz (Flicker)	<5%
Overvoltage Protection	320 V
In-rush Current	0.5 A
THD	<10%
Operating Temperature	0-40°C
Suspension Centres	130mm
Dimensions (Excluding Sign)	267 x 34 x 54mm
Warranty (Excluding Battery)	5 Years
Certification	CE, ROHS

## Emergency

Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium iron phosphate)
Battery Pack	3.2v 600mAh

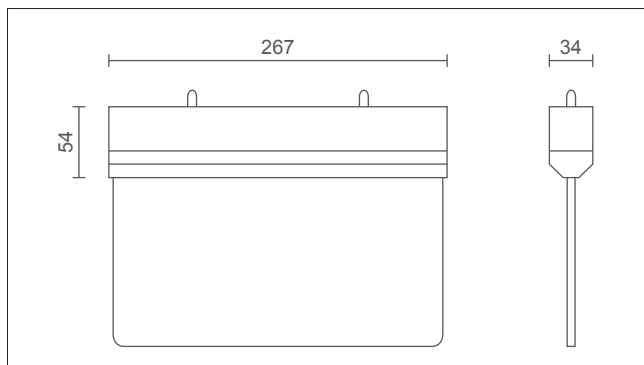

**BumbleBee**