

Jaguar D (Direct)



Performance

Standalone Length (mm)	Start/End Length (mm)	Middle Length (mm)	Lumen Outputs (lm)	Wattage (W)	Performance (lm/cW)
574	567	560	1640	13.2	124.24
644	637	630	1840	14.9	123.49
714	707	700	2040	16.5	123.64
784	777	770	2250	18.2	123.63
854	847	840	2450	19.8	123.74
924	917	910	2650	21.5	123.26
994	987	980	2860	23.1	123.81
1064	1057	1050	3060	24.8	123.39
1134	1127	1120	3270	26.4	123.86
1204	1197	1190	3470	28.1	123.49
1274	1267	1260	3670	29.7	123.57
1344	1337	1330	3880	31.4	123.57
1414	1407	1400	4080	33	123.64
1484	1477	1470	4290	34.7	123.63
1554	1547	1540	4490	36.3	123.69
1624	1617	1610	4690	38	123.42
1694	1687	1680	4900	39.6	123.74
1764	1757	1750	5100	41.3	123.49
1834	1827	1820	5310	42.9	123.78
1904	1897	1890	5510	44.6	123.54
1974	1967	1960	5710	46.2	123.59
2044	2037	2030	5920	47.9	123.59
2114	2107	2100	6120	49.5	123.64
2184	2177	2170	6320	51.2	123.44
2254	2247	2240	6530	52.8	123.67

BumbleBee

Tel: 01489 878 406 Email: info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk
 BumbleBee, Unit 11, Lycroft Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ

Jaguar D (Direct)





Performance

Rated Supply Voltage	220 – 240 V
AC Voltage Range	202 – 250 V
Mains Frequency	50/60 Hz
Output LF current ripple @ 120Hz (Flicker)	<5%
Overvoltage Protection	290 V
THD	<5%
Dimming Options	DALI 1-10V
Dimming Range	1-100%
Operating Temperature	-25 +60 °C
Longevity (L80/B10)	72,000 hours
UGR Rating	<19
Colour Rendering (3 SDCM)	Ra>80
Mounting Options	Surface Suspended
Dimensions	50 x 75mm
Weight	3.9kg/m
Warranty	5 Years
Certification	CE, ROHS
Performance	ETL, SKA

Emergency

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0 – 60°C
Power Efficiency	95%
Certification	CE, ROHS

90°

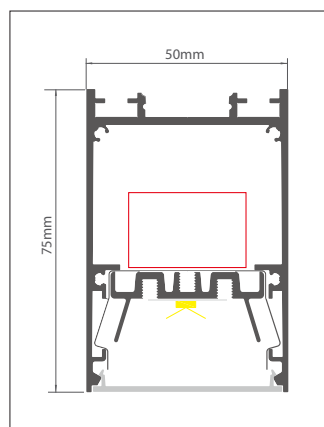

BumbleBee