

# Shield RCD




## Performance

Wattage	3W
Rated Supply Voltage	220–240 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	0.5 A
THD	<10%
Operating Temperature	0 - 40 °C
Longevity (L70/B10)	60,000 hours
Cutout	290 x 45mm
Dimensions (Excluding Sign)	312 x 70 x 57mm
Weight	1.2 kg
Warranty	5 Years
Certification	CE, ROHS

## Emergency

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3.2V 600mAh
Parasitic Load	1.2W
Certification	CE, ROHS

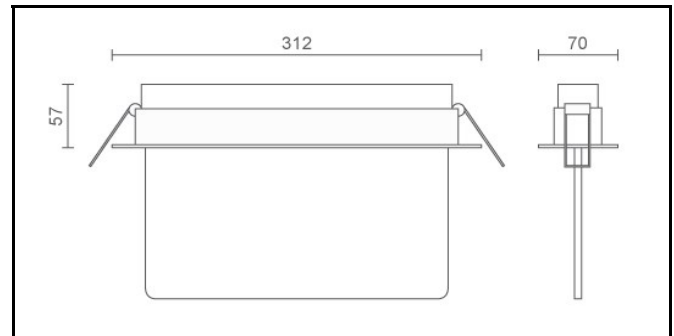

Tel: 01489 878 406 Email: [Info@bumblebee-lighting.co.uk](mailto:Info@bumblebee-lighting.co.uk) Web: [bumblebee-lighting.co.uk](http://bumblebee-lighting.co.uk)

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

**BumbleBee**

