

Terum 300x1200



Performance


Lumen Output	Wattage	lm/cW
3000lm (4000K)	28.1 W	107.8
3702lm (4000K)	34.9 W	106.1
4004lm (4000K)	37.8 W	105.9

Diffuser	Frosted
Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	12 A
THD	<5%
Dimming Type (Optional)	DALI
Operating Temperature	-25 +60 °C
UGR Rating	<19
Colour Rendering (3 SDCM)	Ra>82
Longevity (L70/B10)	60,000 hours
IP Rating	IP44
Dimensions	1195 x 295 x 10 mm
Weight	3.8 kg
Warranty	5 Years
Certification	CE, ROHS

Emergency (Optional)

BLF	Lumen Output
10%	300lm
10%	370lm
9%	360lm

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0–60 °C
Power Efficiency	95%
Certification	CE, ROHS

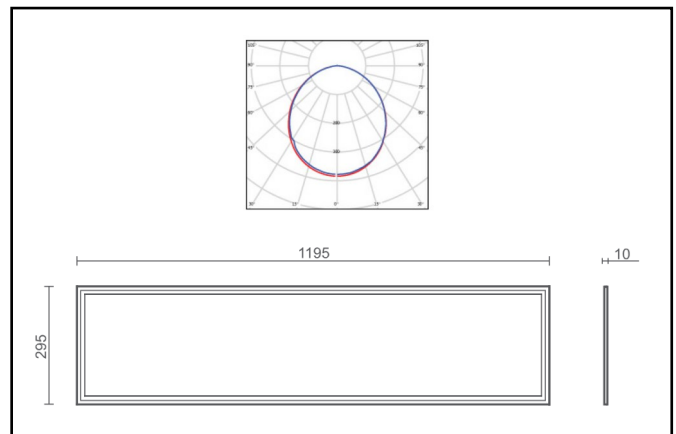

Tel: 01489 878 406 Email: Info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

