

Roma



Performance


Lumen Output	Wattage	lm/cW
1400lm (4000K)	12.0	116.7
2000lm (4000K)	17.1	116.6
2600lm (4000K)	22.5	115.6
3200lm (4000K)	27.7	115.5
3800lm (4000K)	33.1	114.8

Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	5 A
THD	<10%
Dimming Type	DALI
Operating Temperature	-25... +60 °C
Longevity (L70/B10)	60,000 hours
Colour Rendering (3 SDCM)	Ra>82
IP Rating	IP44
Dimensions	Ø300 x 65mm Ø350 x 65mm Ø450 x 65mm Ø600 x 65mm
Weight	3.5 kg 3.9 kg 4.8 kg 5.8 kg
Warranty	5 Years
Certification	CE, ROHS

Emergency (Optional)

BLF	Lumen Output
25%	350lm
18%	360lm
14%	364lm
11%	352lm
9%	343lm

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0–60 °C
Power Efficiency	95%
Certification	CE, ROHS

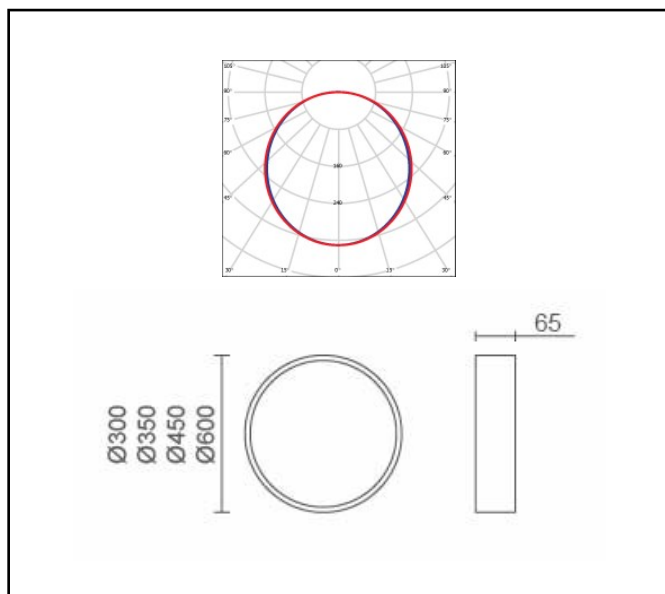

Tel: 01489 878 406 Email: Info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

