

# Anura



## Performance



Typical Lumen Outputs	Wattage	lm/cW
4293 lm	40.4 W	106.3

Material	Polycarbonate
Rated Supply Voltage	220–240 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	0.5 A
THD	<10%
Operating Temperature	0–40°C
Longevity (L70/B10)	60,000 hours
Dimming	DALI
IP Rating	IP65
Mounting Type	Surface
Dimensions	1275 x 86 x 80mm
Weight	4.5 kg
Warranty	5 Years
Certification	CE, ROHS

## Emergency

BLF	Emergency Lumen Output
20%	859 lm

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	NiMH (Nickel-Metal Hydride)
Battery Pack	4 x 2.0V 4.0Ah
Parasitic Load	1.5W
Operating Temperature	0–60°C
Power Efficiency	95%
Certification	CE, ROHS

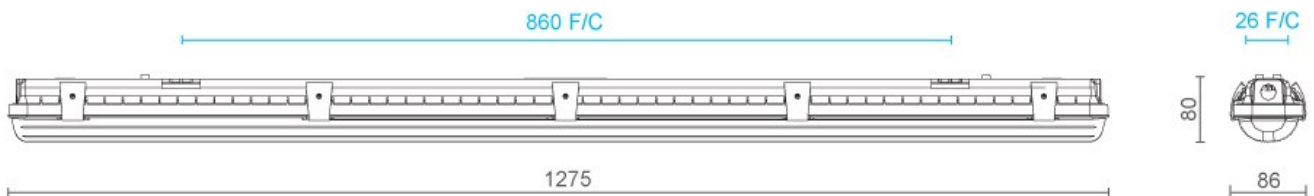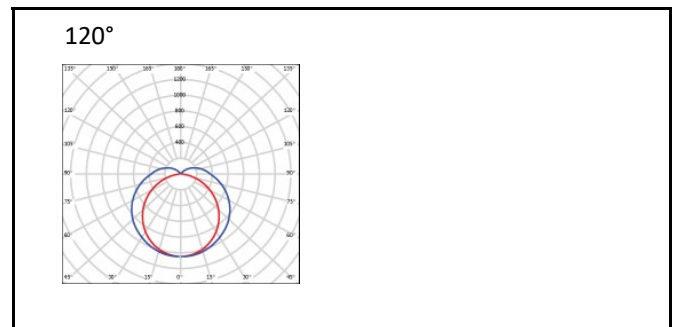

Tel: 01489 878 406 Email: [Info@bumblebee-lighting.co.uk](mailto:Info@bumblebee-lighting.co.uk) Web: [bumblebee-lighting.co.uk](http://bumblebee-lighting.co.uk)

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

**BumbleBee**

