


Barracuda Linear Spot



Performance

Lumen Output	Wattage	lm/cW
1120lm (320mm)	11.0 W	101.8
2240lm (640mm)	22.0 W	101.8
3390lm (960mm)	33.0 W	102.7

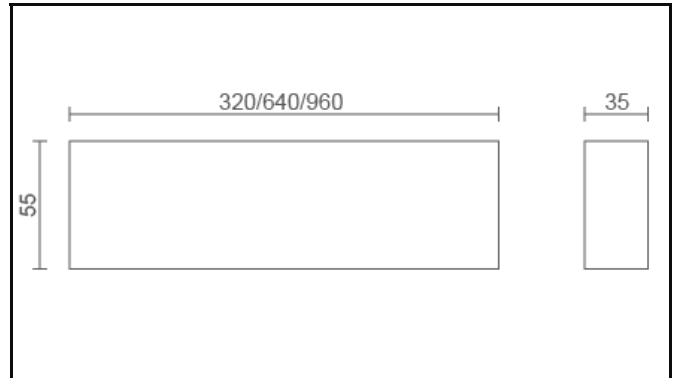

Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	12 A
THD	<10%
Dimming Type (Optional)	DALI
Dimming Range	1–100%
Operating Temperature	-25... +60 °C
Longevity (L70/B10)	60,000 hours
Colour Rendering	Ra>82
Mounting	Track
Dimensions	35x55x320/640/960mm
Weight	2.4/3.6/5.4kg
Warranty	5 Years
Certification	CE, ROHS



Tel: 01489 878 406 Email: Info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

