

Brevis R Mini Track



The Brevis R Mini Track (Recessed Light Source) is a $\varnothing 130$ mm downlight which can be surface (Standard) or suspended mounted.

The heatsink is built into the body of the product which enables the downlight to run at cool temperature without the common needs for vents in the vertical walls. The Brevis R Mini Track therefore has a minimalist architectural appearance without any visible fixings and very light weight thanks to its aluminium construction.

Product

Brevis R Mini Track	BRE-T/R/M
---------------------	-----------

Lumen Output

1811lm	/1811
2415lm	/2415

Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K

Beam Angle

60° Beam	/60
----------	-----

Standard Colours*

White	RAL9016
White	RAL9010
Black	RAL9005
*Other colours available upon special request	

Mounting

Track mounted as default	
Track Suspended - 2.0m suspension kit	-S

Dimming

Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-SD
Mains dimming	-MD
Casambi	-CA

Lighting Data

Lumen Output	Wattage	lm/cW
1811lm (4000K)	15.7W	115.4
2415lm (4000K)	20.9W	115.6

CCT	3000K 4000K 6500K
Light Source	COB
SDCM	3
Longevity (L70/B10)	60,000 Hours
Colour Rendering	RA>82
UGR	<19


Technical Data

IP Rating	IP20
Construction	Diecast Aluminium
RAL colour (standard)	9016 9010 9005
Mounting Method	Track mounted: Global Powergear Stucchi Unipro
Protective class	Class 1
Impact Resistance (IK)	IK04
Warranty	5 Years
Certification	UKCA, CE, ROHS

Electrical Data

Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	2.5 A
THD	<5%
Power Factor	0.95
Parasitic Load	1.0 W
Operating Temperature	-25 +60 °C

Standard Photometry

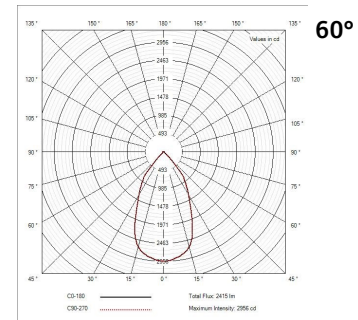

Dimensions

Fixing Centres	Ø90mm
Dimensions	Ø130x 150mm
Weight	2.8 kg

