

Brevis R Track



The Brevis R Track (Recessed light source) is a Ø200mm large area downlight which can be surface (Standard) or suspended mounted.

The heatsink is built into the body of the product which enables the downlight to run at cool temperatures without the common need for vents in the vertical walls. The Brevis R Track therefore has a minimalist architectural appearance without any visible fixings and very light weight thanks to its aluminium construction.

Product

Brevis R Track	BRE-T/R
----------------	---------

Lumen Output

1872lm	/1872
2496lm	/2496

Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K

Beam Angle

60° Beam	/60
----------	-----

Standard Colours*

White	RAL9016
White	RAL9010
Black	RAL9005
*Other colours available upon special request	

Mounting

Track mounted as default	
Track Suspended - 2.0m suspension kit	-S

Dimming

Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-SD
Mains dimming	-MD
Casambi	-CA

Emergency

No emergency facility as default	
3 hour internal pack	-E1
3 hour internal pack with self-test function	-E2
3 hour integral pack with DALI reporting function	-E3

Lighting Data

Lumen Output	Wattage	lm/cW
1872lm	15.0W	124.8
2496lm	20.0W	124.8

CCT	3000K 4000K 6500K
Light Source	LED CREE
SDCM	3
Longevity (L70/B10)	60,000 Hours
Colour Rendering	RA>82
UGR	<19

Technical Data

IP Rating	IP20
Construction	Diecast Aluminium
RAL colour (standard)	9016 9010 9005
Mounting Method	Track mounted: Global Powergear Stucchi Unipro
Protective class	1
Impact Resistance (IK)	IK04
Warranty	5 Years
Certification	UKCA, CE, ROHS

Electrical Data


Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	12 A
THD	<5%
Power Factor	0.95
Parasitic Load	1.0W
Operating Temperature	-25 +60 °C

Emergency Data

BLF	Lumen Output
19%	347
14%	347


Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0–60 °C
Power Efficiency	95%
Certification	CE, ROHS

Standard Photometry

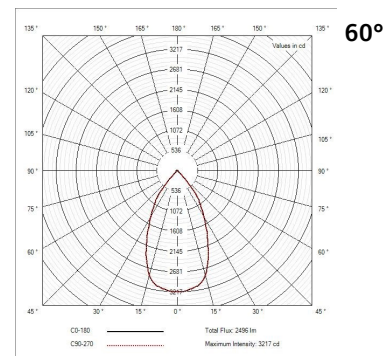

Dimensions

Fixing Centres	Ø140mm
Dimensions	Ø195 x 195mm
Weight	3.5 kg

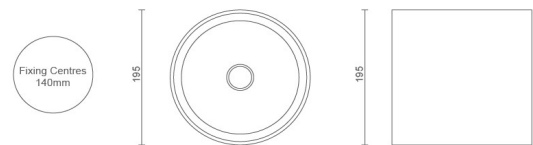

Tel: 01489 878 406 Email: Info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

