Jaguar Twist Track



The Jaguar Twist Track is a linear track mounted luminaire that can rotate 320° allowing it to be mounted transversely to the

The Jaguar Twist Track luminaire is built in a modular system for ease of installation and maintenance. All the electronic gear and wiring is housed on a removable gear tray separate from the main body and retained by sprung metal clips.

Product

Jaguar Track	JAG-T/T/D

Diffuser Option

Opal	/F2
Prismatic	/P1

Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K
Tunable White	/TW

Length*

574mm	/574
644mm	/644
714mm	/714
784mm	/784
854mm	/854
924mm	/924

Standard Colours*

Traffic White	RAL9016
Pure White	RAL9010
Jet Black	RAL9005
*Other colours available upon special request	

Dimming


Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-TD
Casambi dimming	-CA

Mounting

Track mounted as default	

Tel: 01489 878 406 Email: Info@bumblebee-lighting.co.uk

Web: bumblebee-lighting.co.uk









Lighting Data

Lumen Output	Wattage	ll/cW
1638lm/m (Opal F2)	12.9	127.0 ll/cW
1704lm/m (Prismatic P1)	12.9	132.1 ll/cW

сст	3000K 4000K 6500K
Light Source	SMD
SDCM	3
Longevity (L70/B10)	70,000 Hours
Colour Rendering (CRI)	80
UGR	<19.0


Technical Data

IP Rating	IP20
Construction	Aluminium Body Polycarbonate Diffuser
RAL colour (standard)	9016 9010 9005
Mounting Method	Track mounted: Global Powergear Stucchi Unipro
Protective class	1
Warranty	5 Years
Certification	UKCA, CE, ROHS

Electrical Data

Rated Supply Voltage	220-240 V
AC Voltage Range	198-264 V
Mains Frequency	50/60 Hz
Output LF current ripple @ 2KHz (Flicker)	<4%
Overvoltage Protection	320 V
In-rush Current	20.9 A
THD	<10%
Power Factor	98%
Parasitic Load	1.25W
Operating Temperature	-25 +60 °C

Standard Photometry

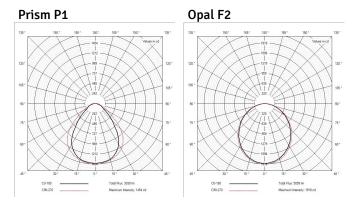

Dimensions

Fixing Centres	Adjustable - Length of profile
Dimensions	50 x 75mm profile section 574 to 924mm profile length
Weight	3.7 kg/m

