

# Nero R Mini



The Nero R Mini is part of the Nero family. It tackles glare by using a light source set back from the bezel whilst maximising light output with a specular aluminium reflector.

This luminaire is construction from two die-cast parts – the heastsink and bezel. These components are held together at the point of articulation for ease of maintenance.

## Product

Nero R Mini	NER/R/M
-------------	---------

## Lumen Output

907lm	/907
1134lm	/1134

## Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K

## Beam Angle

36° Beam	/36
60° Beam	/60

## Standard Colours\*

White	RAL9016
White	RAL9010
Black	RAL9005
*Other colours available upon special request	

## Mounting

Recessed
----------

## Dimming

Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-SD
Mains dimming	-MD
Casambi	-CA

## Emergency

No emergency facility as default	
3 hour internal pack	-E1
3 hour internal pack with self-test function	-E2
3 hour integral pack with DALI reporting function	-E3

## Lighting Data

Lumen Output	Wattage	lm/cW
907lm (4000K)	8.4W	108.0
1134lm (4000K)	10.5W	108.0

CCT	3000K 4000K 6500K
Light Source	COB
SDCM	3
Longevity (L70/B10)	60,000 Hours
Colour Rendering	RA>82
UGR	<19.0

## Technical Data

IP Rating	IP54
Construction	Diecast Aluminium
RAL colour (standard)	9016 9010 9005
Mounting Method	Recessed
Protective class	1
Impact Resistance (IK)	IK07
Warranty	5 Years
Certification	UKCA, CE, ROHS

## Electrical Data


Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	2.5 A
THD	<10%
Power Factor	89%
Parasitic Load	2.1W
Operating Temperature	-25 +60 °C

## Emergency Data

BLF	Lumen Output
33%	302lm
27%	302lm

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO <sub>4</sub> (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0–60 °C
Power Efficiency	95%
Certification	CE, ROHS

## Standard Photometry

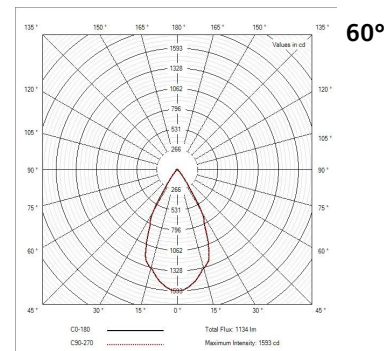

## Dimensions

Cutout	Ø80mm
Dimensions	Ø90 x 102mm
Weight	1.2 kg



Tel: 01489 878 406 Email: [info@bumblebee-lighting.co.uk](mailto:info@bumblebee-lighting.co.uk) Web: [bumblebee-lighting.co.uk](http://bumblebee-lighting.co.uk)

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

