

# Burst



The Burst is a Ø188mm large area downlight aimed at low glare environments (UGR <19). The downlight only requires 80mm of ceiling void making it ideal for installations where space is tight. The Burst can achieve a lumen package of up to 1,724lm with a longevity of at least 60,000 hours.

The heatsink is made from die-cast aluminium which houses the LED module. The bezel of the downlight is machined from aluminium ensuring a constant high quality finish with no surface blemishes. The product is then retained in the ceiling. The bezel then twist locks on underneath the ceiling plane with no visible fixings.

## Product

Burst	BUR/
-------	------

## Lumen Output

1313lm	/1313
1724lm	/1724

## Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K

## Beam Angle

36° Beam	/36
60° Beam	/60
80° Beam	/80

## Standard Colours\*

White	RAL9016
White	RAL9010
Black	RAL9005
*Other colours available upon special request	

## Mounting

Recessed mounted as default	
-----------------------------	--

## Dimming

Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-SD
Mains dimming	-MD
Casambi	-CA

## Emergency

No emergency facility as default	
3 hour internal pack	-E1
3 hour internal pack with self-test function	-E2
3 hour integral pack with DALI reporting function	-E3

## Lighting Data

Lumen Output	Wattage	lm/cW
1313lm	15.6W	84.2
1724lm	20.8W	82.3

CCT	3000K 4000K 6500K
Light Source	COB
SDCM	3
Longevity (L70/B10)	60,000 Hours
Colour Rendering	RA>82
UGR	<19

## Technical Data

IP Rating	IP44
Construction	Diecast Aluminium
RAL colour (standard)	9016 9010 9005
Mounting Method	Recessed
Protective class	SELV
Impact Resistance (IK)	IK07
Warranty	5 Years
Certification	UKCA, CE, ROHS

## Electrical Data


Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	14 A
THD	<10%
Power Factor	0.95
Parasitic Load	1.0 W
Operating Temperature	-25 +60 °C

## Emergency Data

BLF	Lumen Output
17%	235lm
14%	235lm


Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0–60 °C
Power Efficiency	95%
Certification	CE, ROHS

## Standard Photometry

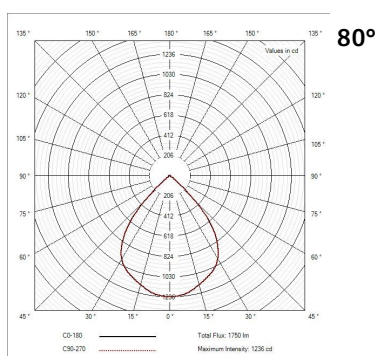

## Dimensions

Fixing Centres	Ø160mm
Dimensions	Ø188x 80mm
Weight	2.7 kg

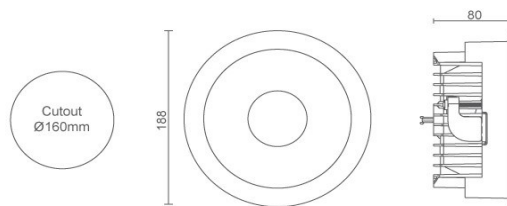

Tel: 01489 878 406 Email: [info@bumblebee-lighting.co.uk](mailto:info@bumblebee-lighting.co.uk) Web: [bumblebee-lighting.co.uk](http://bumblebee-lighting.co.uk) ISO 9001(UKAS) ISO 14001(UKAS)

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

