

Anura



The Anura comes in 600,1200,1500mm, they are IP65 rated linear surface or suspended luminaire often referred to as a 'Vapour Proof'. The product is supplied surface mounted as standard and can be supplied with an optional suspension kit.

Due to its polycarbonate moulded construction the IP65 luminaire also has an IK08 impact rating making it suitable for industrial, car parks as well as ancillary areas. The fitting is supplied with a frosted diffuser and polycarbonate or stainless steel diffuser clips to suit the installation environment.

Product

Anura	ANA/
-------	------

Lumen Output

2400lm (600mm)	/2400
5127lm (1200mm)	/5127
6696lm (1500mm)	/6696

Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K

Standard Colours*

Grey	
*Other colours available upon special request	

Mounting

Surface mounted as default	
Suspended - 2.0m suspension kit complete with ceiling rose	-S

Dimming

Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-SD
Mains dimming	-MD
Casambi dimming	-CA

Emergency

No emergency facility as default	
3 hour internal pack	-E1
3 hour internal pack with self-test function	-E2
3 hour integral pack with DALI reporting function	-E3

Lighting Data

Lumen Output	Wattage	lm/cW
5127lm (4000K)	37.8W	135.6
6696lm (4000K)	49.4W	135.5

CCT	3000K 4000K
Light Source	SMD
SDCM	3
Longevity (L70/B10)	50,000 Hours
Colour Rendering	RA>82
UGR	<22

Technical Data

IP Rating	IP65
Construction	Polycarbonate
Colour (standard)	Grey
Mounting Method	Surface 2m Suspension
Protective class	I
Impact Resistance (IK)	IK08
Fire rating (Flame Class)	V-2
Warranty	5 Years
Certification	UKCA, CE, ROHS

Electrical Data


Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	2.5 A
THD	<10%
Power Factor	0.95
Parasitic Load	0.9
Operating Temperature	-25 +60 °C

Emergency Data

BLF	Lumen Output
7%	380
6%	380


Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0–60 °C
Power Efficiency	95%
Certification	UKCA, CE, ROHS

Standard Photometry

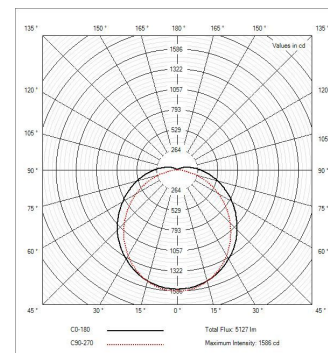

Dimensions

Dimensions	80 x 72 x 1200mm 80 x 72 x 1500mm
Weight	1.4 kg

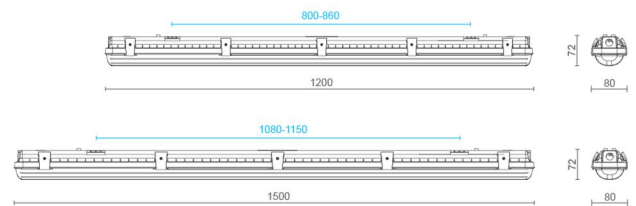

Tel: 01489 878 406 Email: Info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk ISO 9001(UKAS) ISO 14001(UKAS)

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

