


Python DI

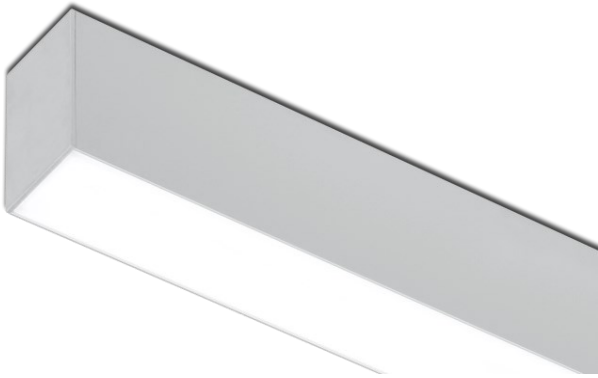

The Python DI Direct/Indirect is our largest linear luminaire which can be supplied in continuous lengths of 70mm increments. Continuous lengths of multiple runs come as standard with a 'through wiring' loom meaning that only the start module of the run requires termination.

The DLOR & ULOR of the Python DI can be programmed independently to give a fully customisable uplight to downlight ratio such as 90/10, 70/30 and 50/50.

The luminaire is built in a modular system for ease of installation and maintenance. All the electronic gear and wiring is housed on a removable gear tray separate from the main body and retained by sprung metal clips.

Product

Python Direct/Indirect	PHY/DI
------------------------	--------

Diffuser Option

Opal	/F2
Prismatic	/P1

Module Type

Standalone	/0
Start	/1
Middle	/2
End	/3
Corner	/4
Cross	/5

Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K
Tunable White	/TW

Length*

574mm to 2954mm (*See table matrix)	/*****
-------------------------------------	--------

Standard Colours*

Traffic White	RAL9016
Pure White	RAL9010
Jet Black	RAL9005
*Other colours available upon special request	

Dimming

Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-TD
Casambi dimming	-CA

Mounting

Surface mounted as default	
Suspended - 2.0m suspension kit (adjustable)	-S

Sensor

PIR & Daylight	-S1
Smart Mesh, PIR & Daylight	-S2

Emergency

No emergency facility as default	
3 hour internal pack	-E1
3 hour internal pack with self-test function	-E2
3 hour integral pack with DALI reporting function	-E3

Standalone Length (mm)	Start/End Length (mm)	Middle Length (mm)	Lumen Outputs (lm) (Based on Opal 175mA)	Wattage (W) (Based on Opal 175mA)	Performance (lm/cW) (Based on Opal 175mA)
574	567	560	970	8.70	111.49
644	637	630	1090	9.79	111.37
714	707	700	1210	10.88	111.26
784	777	770	1330	11.96	111.18
854	847	840	1450	13.05	111.11
924	917	910	1570	14.14	111.05
994	987	980	1690	15.23	111.00
1064	1057	1050	1810	16.31	110.96
1134	1127	1120	1930	17.40	110.92
1204	1197	1190	2050	18.49	110.89
1274	1267	1260	2170	19.58	110.86
1344	1337	1330	2290	20.66	110.83
1414	1407	1400	2410	21.75	110.80
1484	1477	1470	2530	22.84	110.78
1554	1547	1540	2650	23.93	110.76
1624	1617	1610	2770	25.01	110.74
1694	1687	1680	2885	26.10	110.54
1764	1757	1750	3010	27.19	110.71
1834	1827	1820	3130	28.28	110.70
1904	1897	1890	3250	29.36	110.69
1974	1967	1960	3370	30.45	110.67
2044	2037	2030	3490	31.54	110.66
2114	2107	2100	3610	32.63	110.65
2184	2177	2170	3730	33.71	110.64
2254	2247	2240	3850	34.80	110.63
2324	2317	2310	3970	35.89	110.62
2394	2387	2380	4090	36.98	110.62
2464	2457	2450	4210	38.06	110.61
2534	2527	2520	4330	39.15	110.60
2604	2597	2590	4450	40.24	110.59
2674	2667	2660	4570	41.33	110.59
2744	2737	2730	4690	42.41	110.58
2814	2807	2800	4810	43.50	110.57
2884	2877	2870	4930	44.59	110.57
2954	2947	2940	5050	45.68	110.56

Lighting Data

CCT	3000K 4000K 6500K
Light Source	SMD
SDCM	3
Longevity (L70/B10)	70,000 Hours
Colour Rendering (CRI)	80
UGR	<19.0

Technical Data

IP Rating	IP20
Construction	Aluminium Body Polycarbonate Diffuser
RAL colour (standard)	9016 9010 9005
Mounting Method	2m Suspension
Protective class	1
Warranty	5 Years
Certification	UKCA, CE, ROHS

Electrical Data


Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF current ripple @ 2KHz (Flicker)	<4%
Overvoltage Protection	320 V
In-rush Current	20.9 A
THD	<10%
Power Factor	98%
Parasitic Load	1.25W
Operating Temperature	-25 +60 °C

Emergency Data


Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0–60 °C
Power Efficiency	95%
Certification	CE, ROHS

Standard Photometry

Prism P1



Opal F1



Dimensions

Fixing Centres	Adjustable - Length of profile
Dimensions	65 x 100mm profile section 574 to 2954mm profile length
Weight	4.1 kg/m

