

Rida Track



The Rida is a compact adjustable track mounted spotlight which is compatible with Powergear, Global and other track systems.

The luminaire can be supplied in with single and three phase versions and can also be used with DALI dimming tracks.

This luminaire is construction from two die-cast parts – the heatsink and bezel. These components are held together at the point of articulation for ease of maintenance.

Product

Rida	RID-T
------	-------

Lumen Output

1494lm	/1494
1868lm	/1868
2491lm	/2491

Colour Temperature

3000K	/3K
4000K	/4K
6500K	/6K

Beam Angle

36° Beam	/36
45° Beam	/45

Standard Colours*

White	RAL9016
White	RAL9010
Black	RAL9005
*Other colours available upon special request	

Mounting

Track Mounted – Global, Powergear, Stucchi, Unipro
--

Dimming

Fixed output as default	
DALI dimming	-DA
Switch dim/Touch dim	-SD
Mains dimming	-MD
Casambi	-CA

Lighting Data

Lumen Output	Wattage	lm/cW
1868lm (4000K)	15.1W	123.7
2491lm (4000K)	20.1W	123.9

CCT	3000K 4000K
Light Source	COB
SDCM	3
Longevity (L70/B10)	60,000 Hours
Colour Rendering	RA>82
UGR	<19.0


Technical Data

IP Rating	IP20
Construction	Diecast Aluminium
RAL colour (standard)	9016 9010
Mounting Method	Track mounted: Global Powergear Stucchi Unipro
Protective class	1
Impact Resistance (IK)	IK04
Warranty	5 Years
Certification	UKCA, CE, ROHS

Electrical Data


Rated Supply Voltage	220–240 V
AC Voltage Range	198–264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<3%
Overvoltage Protection	320 V
In-rush Current	2.5 A
THD	<10%
Power Factor	95%
Parasitic Load	0.8W
Operating Temperature	-25 +60 °C

Standard Photometry

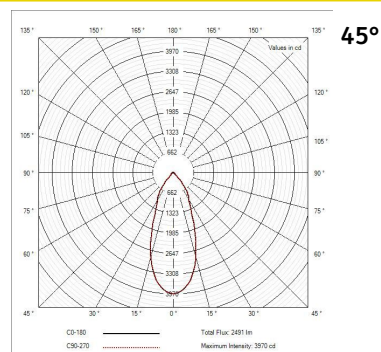

Dimensions

Dimensions (adapter)	260x32mm
Dimensions (spotlight)	Ø104 x 80mm
Weight	1.7 kg

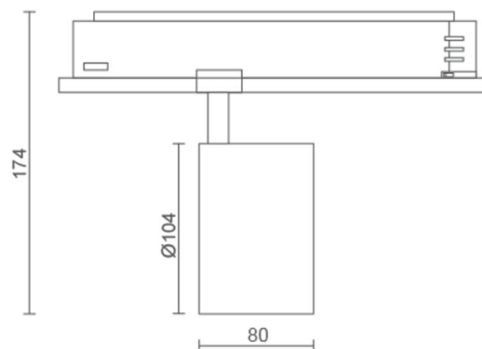

Tel: 01489 878 406 Email: Info@bumblebee-lighting.co.uk Web: bumblebee-lighting.co.uk ISO 9001(UKAS) ISO 14001(UKAS)

Bumblebee, Unit 16 Business Park, Park Lane, Upper Swanmore, Southampton, SO32 2QQ Company No: 10464972 VAT No: 254 3859 81

BumbleBee

